

1 INTRODUCTION

Congratulations on your choice of an AgriMetal Pull-Type Leaf Blower to complement your operation. This equipment has been designed and manufactured to meet the needs of a discerning turf care industry.

Safe, efficient and trouble free operation of your AgriMetal Leaf Blower requires that you and anyone else who will be operating or maintaining the machine, read and understand the Safety, Operation, Maintenance and Trouble Shooting information contained within the Operator's Manual.



This manual covers the Model BWT 200 Pull-Type Leaf Blower. Use the Table of Contents or Index as a guide to locate required information.

Keep this manual handy for frequent reference and to pass on to new operators or owners. Call your AgriMetal Dealer or Distributor if you need assistance, information or additional copies of the manuals.

OPERATOR ORIENTATION - The directions left, right, front and rear, as mentioned throughout this manual, are as seen from behind the tractor driver's seat and facing in the direction of travel.

2 SAFETY

SAFETY ALERT SYMBOL

This Safety Alert symbol means **ATTENTION! BECOME ALERT! YOUR SAFETY IS INVOLVED!**



The Safety Alert symbol identifies important safety messages on the AgriMetal Pull-Type Leaf Blower and in the manual. When you see this symbol, be alert to the possibility of personal injury or death. Follow the instructions in the safety message.

Why is SAFETY important to you?

3 Big Reasons

Accidents Disable and Kill
Accidents Cost
Accidents Can Be Avoided

SIGNAL WORDS:

Note the use of the signal words **DANGER**, **WARNING** and **CAUTION** with the safety messages. The appropriate signal word for each message has been selected using the following guide-lines:

SI NO LEE INGLES, PIDA AYUDA A AIGUIEN QUE SI LO LEA PARA QUE LE TRADUZCA LAS MIDIDAS DE SEGURIDAD.

DANGER - Indicates an imminently hazardous situation that, if not avoided, will result in death or serious injury. This signal word is to be limited to the most extreme situations typically for machine components which, for functional purposes, cannot be guarded.

WARNING - Indicates a potentially hazardous situation that, if not avoided, could result in death or serious injury, and includes hazards that are exposed when guards are removed. It may also be used to alert against unsafe practices.

CAUTION - Indicates a potentially hazardous situation that, if not avoided, could result in death or serious injury, and includes hazards that are exposed when guards are removed. It may also be used to alert against unsafe practices.

If you have any questions not answered in this manual or require additional copies or the manual is damaged, please contact your dealer or AgriMetal Inc., 1006 Rue Principale, Wickham, Quebec, Canada, J0C 1S0. Phone (819) 398-6883 or fax (819) 398-5311.

SAFETY

YOU are responsible for the SAFE operation and maintenance of your AgriMetal Pull-Type Leaf Blower. **YOU** must ensure that you and anyone else who is going to operate, maintain or work around the Leaf Blower be familiar with the operating and maintenance procedures and related **SAFETY** information contained in this manual. This manual will take you step-by-step through your working day and alerts you to all good safety practices that should be adhered to while operating the Leaf Blower.

Remember, **YOU** are the key to safety. Good safety practices not only protect you but also the people around you. Make these practices a working part of your safety program. Be certain that **EVERYONE** operating this equipment is familiar with the recommended operating and maintenance procedures and follows all the safety precautions. Most accidents can be prevented. Do not risk injury or death by ignoring good safety practices.

- Leaf Blower owners must give operating instructions to operators or employees before allowing them to operate the machine, and at least annually thereafter per OSHA (Occupational Safety and Health Administration) regulation 1928.57.
- The most important safety device on this equipment is a SAFE operator. It is the operator's responsibility to read and understand ALL Safety and Operating instructions in the manual and to follow these. Most accidents can be avoided.
- A person who has not read and understood all operating and safety instructions is not qualified to operate the machine. An untrained operator exposes himself and bystanders to possible serious injury or death.
- Do not modify the equipment in any way. Unauthorized modification may impair the function and/or safety and could affect the life of the equipment.
- Think SAFETY! Work SAFELY!

2.1 GENERAL SAFETY

1. Read and understand the Operator's Manual and all safety signs before operating, maintaining, adjusting or unplugging the Leaf Blower.



2. Have a first-aid kit available for use should the need arise and know how to use it.




3. Have a fire extinguisher available for use should the need arise and know how to use it.



4. Do not allow riders.


5. Wear appropriate protective gear. This list includes but is not limited to:

- A hard hat
- Protective shoes with slip resistant soles
- Protective glasses or goggles
- Heavy gloves
- Wet weather gear
- Hearing protection
- Respirator or filter mask

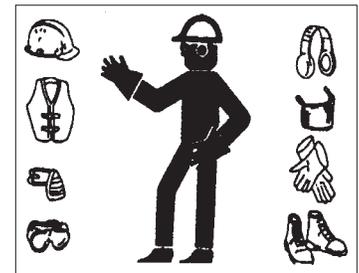

6. Install and secure all guards before starting.

7. Wear suitable ear protection for prolonged exposure to excessive noise.



8. Place all controls in neutral, stop engine, set park brake, remove ignition key and wait for all moving parts to stop before servicing, adjusting, repairing or unplugging.

9. Clear the area of people, especially small children, before starting the unit.

10. Review safety related items annually with all personnel who will operating or maintaining the Leaf Blower.

2.2 EQUIPMENT SAFETY GUIDELINES

1. Safety of the operator and bystanders is one of the main concerns in designing and developing a machine. However, every year many accidents occur which could have been avoided by a few seconds of thought and a more careful approach to handling equipment. You, the operator, can avoid many accidents by observing the following precautions in this section. To avoid personal injury or death, study the following precautions and insist those working with you, or for you, follow them.
2. In order to provide a better view, certain photographs or illustrations in this manual may show an assembly with a safety shield removed. However, equipment should never be operated in this condition. Keep all shields in place. If shield removal becomes necessary for repairs, replace the shield prior to use.
3. Replace any safety sign or instruction sign that is not readable or is missing. Location of such safety signs is indicated in this manual.
4. Never use alcoholic beverages or drugs which can hinder alertness or coordination while operating this equipment. Consult your doctor about operating this machine while taking prescription medications.
5. **Under no circumstances should young children be allowed to work with this equipment. Do not allow persons to operate or assemble this unit until they have read this manual and have developed a thorough understanding of the safety precautions and of how it works.** Review the safety instructions with all users annually.
6. This equipment is dangerous to children and persons unfamiliar with its operation. The operator should be a responsible, properly trained and physically able person familiar with machinery and trained in this equipment's operations. If the elderly are assisting with work, their physical limitations need to be recognized and accommodated.
7. Use a tractor equipped with a Roll Over Protective Structure (ROPS).
8. Never exceed the limits of a piece of machinery. If its ability to do a job, or to do so safely, is in question - **DON'T TRY IT.**
9. Do not modify the equipment in any way. Unauthorized modification result in serious injury or death and may impair the function and life of the equipment.
10. In addition to the design and configuration of this implement, including Safety Signs and Safety Equipment, hazard control and accident prevention are dependent upon the awareness, concern, prudence, and proper training of personnel involved in the operation, transport, maintenance, and storage of the machine. Refer also to Safety Messages and operation instruction in each of the appropriate sections of the tow vehicle, engine and machine Manuals. Pay close attention to the Safety Signs affixed to the tow vehicle and the machine.

2.3 SAFETY TRAINING

1. Safety is a primary concern in the design and manufacture of our products. Unfortunately, our efforts to provide safe equipment can be wiped out by a single careless act of an operator or bystander.
2. In addition to the design and configuration of equipment, hazard control and accident prevention are dependent upon the awareness, concern, prudence and proper training of personnel involved in the operation, transport, maintenance and storage of this equipment.
3. It has been said, "The best safety feature is an informed, careful operator." We ask you to be that kind of an operator. It is the operator's responsibility to read and understand ALL Safety and Operating instructions in the manual and to follow these. Accidents can be avoided.An illustration showing a pair of hands holding an open book or manual, symbolizing reading and understanding instructions.
4. Working with unfamiliar equipment can lead to careless injuries. Read this manual, and the manual for your tow vehicle, before assembly or operating, to acquaint yourself with the machines. If this machine is used by any person other than yourself, or is loaned or rented, it is the machine owner's responsibility to make certain that the operator, prior to operating:
 - a. Reads and understands the operator's manuals.
 - b. Is instructed in safe and proper use.
5. Know your controls and how to stop tow vehicle, engine, and machine quickly in an emergency. Read this manual and the one provided with your tow vehicle.
6. Train all new personnel and review instructions frequently with existing workers. Be certain only a properly trained and physically able person will operate the machinery. A person who has not read and understood all operating and safety instructions is not qualified to operate the machine. An untrained operator exposes himself and bystanders to possible serious injury or death. If the elderly are assisting with work, their physical limitations need to be recognized and accommodated.

2.4 SAFETY SIGNS

1. Keep safety signs clean and legible at all times.
2. Replace safety signs that are missing or have become illegible.
3. Replaced parts that displayed a safety sign should also display the current sign.
4. Safety signs are available from your authorized Distributor or Dealer Parts Department or the factory.

How to Install Safety Signs:

- Be sure that the installation area is clean and dry.
- Be sure temperature is above 50°F (10°C).
- Determine exact position before you remove the backing paper.
- Remove the smallest portion of the split backing paper.
- Align the sign over the specified area and carefully press the small portion with the exposed sticky backing in place.
- Slowly peel back the remaining paper and carefully smooth the remaining portion of the sign in place.
- Small air pockets can be pierced with a pin and smoothed out using the piece of sign backing paper.

2.5 PREPARATION

1. Never operate the tow vehicle and machine until you have read and completely understand this manual, the Tow Vehicle Operator's Manual, and each of the Safety Messages found on the safety signs on the tow vehicle and machine.


2. Personal protection equipment including hard hat, safety glasses, safety shoes, and gloves are recommended




during assembly, installation, operation, adjustment, maintaining, repairing, removal, or moving the implement. Do not allow long hair, loose fitting clothing or jewellery to be around equipment.

3. **PROLONGED EXPOSURE TO LOUD NOISE MAY CAUSE PERMANENT HEARING LOSS!**

Tow Vehicles with or without equipment attached can often be noisy enough to cause permanent, partial hearing loss. We recommend that you wear hearing protection on a full-time basis if the noise in the Operator's position exceeds 80db. Noise over 85db on a long-term basis can cause severe hearing loss. Noise over 90db adjacent to the Operator over a long-term basis may cause permanent, total hearing loss. **NOTE:** Hearing loss from loud noise (from tractors, chain saws, radios, and other such sources close to the ear) is cumulative over a lifetime without hope of natural recovery.



4. Operate the machine only with a tractor equipped with an approved Roll-Over-Protective Structure (ROPS). Always wear your seat belt. Serious injury or even death could result from falling off the tractor ---particularly during a turnover when the operator could be pinned under the ROPS or the tractor.
5. Clear working area of stones, branches or hidden obstacles that might be hooked or snagged, causing injury or damage.
6. Operate only in daylight or good artificial light.
7. Be sure machine is properly mounted, adjusted and in good operating condition.
8. Ensure that all safety shielding and safety signs are properly installed and in good condition.



2.6 OPERATING SAFETY

1. Please remember it is important that you read and heed the safety signs on the Blower. Clean or replace all safety signs if they cannot be clearly read and understood. They are there for your safety, as well as the safety of others. The safe use of this machine is strictly up to you, the operator.
2. All things with moving parts are potentially hazardous. There is no substitute for a cautious, safe-minded operator who recognizes potential hazards and follows reasonable safety practices. The manufacturer has designed this Leaf Blower to be used with all its safety equipment properly attached, to minimize the chance of accidents. Study this manual to make sure you have all safety equipment attached.
3. If a safety shield or guard is removed for any reason, it must be replaced before the machine is again operated.
4. When the use of hand tools is required to perform any part of assembly, installation, adjustment, maintaining, repairing, removal, or moving, be sure the tools used are designed and recommended by the tool manufacturer for that specific task.
5. Personal protection equipment including hearing protection, hard hat, safety glasses, safety shoes, and gloves are recommended during assembly, installation, operation, adjustment, maintaining, repairing, removal, or moving. Do not allow long hair, loose fitting clothing, or jewellery to be around moving parts.
6. Always use two people to handle heavy, unwieldy components during assembly, installation, removal or moving.
7. Never place any part of your body where it would be in danger if movement should occur during assembly, installation, operation, maintaining, repairing, removal or moving.
8. Never place yourself between the tow vehicle and machine while implement is in operation.
9. Place all controls in neutral, stop engine, set park brake, remove ignition key and wait for all moving parts to stop before servicing, adjusting, repairing or unplugging.
10. A heavy load can cause instability of the tow vehicle. Use extreme care during travel. Slow down on turns and watch out for bumps. The tow vehicle may need front counterweights to counterbalance the weight of the machine.
11. Never use alcoholic beverages or drugs which can hinder alertness or coordination while operating this equipment. Consult your doctor about operating this machine while taking prescription medications.
12. Do not allow riders on the machine or tow vehicle at any time. There is no safe place for any riders.
13. Before you operate the machine, check over all pins, bolts, and connections to be sure all are securely in place. Replace any damaged or worn parts immediately.
14. Do not allow anyone who is not familiar with the safety rules and operation instructions to use this machine.
15. Never allow children to operate or be around this machine.
16. Do not reach into blower openings when the engine is running. Keep others away also.
17. Clear the work area of objects which might be picked up and snagged or entangled in the machine.
18. Keep hands, feet, hair, jewellery, and clothing away from all moving and/or rotating parts.
19. Do not direct the air stream toward people, animals or buildings to prevent injury or damage.
20. Do not place hands, feet or other body parts into air stream.

2.7 TRANSPORT SAFETY

1. Comply with state and local laws governing highway safety and movement of machinery on public roads.
2. The use of flashing amber lights is acceptable in most localities. However, some localities prohibit their use. Local laws should be checked for all highway lighting and marking requirements.
3. At all times when driving the tow vehicle and equipment on the road or highway under 20 mph (32 kph), use flashing amber warning lights and a slow moving vehicle (SMV) identification emblem. Do not exceed 20 mph (32 kph). Reduce speed on rough roads and surfaces.
4. Plan your route to avoid heavy traffic.
5. Use a drawbar pin with provisions for a retainer. Install the retainer.
6. Do not drink and drive.
7. Attach safety chain between tow vehicle and machine before transporting.
8. Be a safe and courteous driver. Always yield to oncoming traffic in all situations, including narrow bridges, intersections, etc. Watch for traffic when operating near or crossing roadways.
9. Turn into curves or go up or down hills only at a low speed and at a gradual steering angle. Make certain that at least 20% of the tow vehicle's weight is on the front wheels to maintain safe steering. Slow down on rough or uneven surfaces.
10. Never allow riders on either tow vehicle or machine.
11. Install lighting bar before transporting.

2.8 STORAGE SAFETY

1. Store the unit in an area away from human activity.
2. Do not permit children to play on or around the stored machine.
3. Store the unit in a dry, level area. Support the frame with planks if required.

2.9 REFUELLING SAFETY

1. Handle fuel with care. It is highly flammable.
2. Allow engine to cool for 5 minutes before refuelling. Clean up spilled fuel before restarting engine.
3. Do not refuel the machine while smoking or when near open flame or sparks.
4. Fill fuel tank outdoors.
5. Prevent fires by keeping machine clean of accumulated trash, grease and debris.



2.10 TIRE SAFETY

1. Failure to follow proper procedures when mounting a tire on a wheel or rim can produce an explosion which may result in serious injury or death.
2. Do not attempt to mount a tire unless you have the proper equipment and experience to do the job.
3. Have a qualified tire dealer or repair service perform required tire maintenance.
4. When replacing worn tires, make sure they meet the original tire specifications. Never undersize.

2.11 MAINTENANCE SAFETY


1. Good maintenance is your responsibility. Poor maintenance is an invitation to trouble.
2. Follow good shop practices.

- Keep service area clean and dry.
- Be sure electrical outlets and tools are properly grounded.
- Use adequate light for the job at hand.



3. Make sure there is plenty of ventilation. Never operate an engine in a closed building. The exhaust fumes may cause asphyxiation.
4. Before working on this machine, shut off the engine, set the brakes, and remove the ignition keys.
6. Never work under equipment unless it is blocked securely.
7. Always use personal protection devices such as eye, hand and hearing protectors, when performing any service or maintenance work.
8. Where replacement parts are necessary for periodic maintenance and servicing, genuine factory replacement parts must be used to restore your equipment to original specifications. The manufacturer will not be responsible for injuries or damages caused by use of unapproved parts and/or accessories.

9. A fire extinguisher and first aid kit should be kept readily accessible while performing maintenance on this equipment.



10. Periodically tighten all bolts, nuts and screws and check that all cotter pins are properly installed to ensure unit is in a safe condition.
11. When completing a maintenance or service function, make sure all safety shields and devices are installed before placing unit in service.

2.12 BATTERY SAFETY

1. Keep all sparks and flames away from batteries, as gas given off by electrolyte is explosive.
2. Avoid contact with battery electrolyte: wash off any spilled electrolyte immediately.
3. Wear safety glasses when working near batteries.
4. Do not tip batteries more than 45 degrees, to avoid electrolyte loss.
5. To avoid injury from spark or short circuit, disconnect battery ground cable before servicing any part of electrical system.

2.13 GAS MOTOR SAFETY

BEFORE STARTING ENGINE, READ AND UNDERSTAND THE OPERATING AND MAINTENANCE INSTRUCTIONS THAT CAME WITH YOUR ENGINE.

WARNING: DO NOT

1. DO NOT run engine in an enclosed area. Exhaust gases contain carbon monoxide, an odorless and deadly poison.
2. DO NOT place hands or feet near moving or rotating parts.
3. DO NOT store, spill, or use gasoline near an open flame, or devices such as a stove, furnace, or water heater which use a pilot light or devices which can create a spark.
4. DO NOT refuel indoors where area is not well ventilated. Outdoor refuelling is preferred.
5. DO NOT fill fuel tank while engine is running. Allow engine to cool for 5 minutes before refuelling. Store fuel in approved safety containers.
6. DO NOT remove fuel tank cap while engine is running.
7. DO NOT operate engine if gasoline is spilled. Move machine away from the spill and avoid creating any ignition until the gasoline has evaporated.
8. DO NOT smoke when filling fuel tank.
9. DO NOT choke carburetor to stop engine. Whenever possible, gradually reduce engine speed before stopping.
10. DO NOT run engine above rated speeds. This may result in injury.
11. DO NOT tamper with governor springs, governor links or other parts which may increase the governed engine speed.
12. DO NOT tamper with the engine speed selected by the original equipment manufacturer.
13. DO NOT check for spark with spark plug or spark plug wire removed. Use an approved tester.
14. DO NOT crank engine with spark plug removed. If engine is flooded, place throttle in "FAST" position and crank until engine starts.
15. DO NOT strike flywheel with a hard object or metal tool as this may cause flywheel to shatter in operation. Use proper tools to service engine.
16. DO NOT operate engine without a muffler. Inspect periodically and replace, if necessary. If engine is equipped with muffler deflector, inspect periodically and replace, if necessary with correct deflector.
17. DO NOT operate engine with an accumulation of grass, leaves, dirt or other combustible materials in the muffler area.
18. DO NOT use this engine on any forest covered, brush covered, or grass covered unimproved land unless a spark arrester is installed on the muffler. The arrester must be maintained in effective working order by the operator. In the State of California the above is required by law (Section 4442 of the California Public Resources Code). Other states may have similar laws. Federal laws apply on federal lands.
19. DO NOT touch hot muffler, cylinder or fins because contact may cause burns.
20. DO NOT run engine with air cleaner or air cleaner cover removed.


WARNING: DO

1. ALWAYS DO remove the wire from the spark plug when servicing the engine or equipment TO PREVENT ACCIDENTAL STARTING or disconnect the negative wire from the battery terminal.
2. DO keep cylinder fins and governor parts free of grass and other debris which can affect engine speed.
3. DO examine muffler periodically to be sure it is functioning effectively. A worn or leaking muffler should be repaired or replaced as necessary.
4. DO use fresh gasoline. Stale fuel can gum carburetor and cause leakage.
5. DO check fuel lines and fittings frequently for cracks or leaks. Replace if necessary.

3 SAFETY SIGN LOCATIONS

The types of safety signs and locations on the equipment are shown in the illustrations that follow. Good safety requires that you familiarize yourself with the various safety signs, the type of warning and the area, or particular function related to that area, that requires your SAFETY AWARENESS.

- Think SAFETY! Work SAFELY!

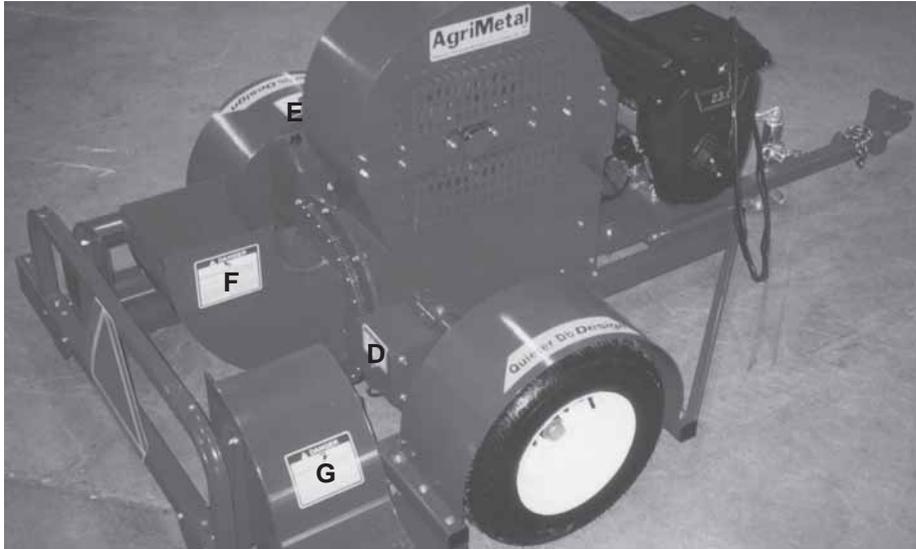

A


 CAUTION	 ATTENTION
<ol style="list-style-type: none"> 1. Read Operator's Manual before starting. 2. Keep guards and shields in place and access doors closed. 3. Keep hands, feet, hair and clothing away from moving parts. 4. Stop engine, place all controls in neutral, set park brake, remove ignition key and wait for all moving parts to stop before servicing, adjusting, repairing or unplugging the machine. 5. Do not climb on the machine or place hands in any opening when the engine is running. 6. Keep people and pets a safe distance from the machine. 7. Do not smoke when refuelling. 8. Block up machine securely before working under it. 9. Keep all electrical wires and connections dry and in good repair. 10. Do not direct discharge duct or hose toward people, animals or property to prevent being hit by fast moving objects. Always wear appropriate safety gear during operation. 11. Review safety instructions annually. 	<ol style="list-style-type: none"> 1. Lire attentivement le manuel d'opération avant la mise en marche. 2. Garder tous les écrans protecteurs in place. 3. Garder les mains, pieds, cheveux et vêtements éloignés des éléments mobiles. 4. Arrêter le moteur, placer tous les contrôles à la position "neutre", enlever la clé du contact et attendre que toutes les places soient au point mort avant de faire tout ajustement, réparation ou de débloquer la machine. 5. Ne pas grimper sur la machine et ne jamais se placer les mains dans toute ouverture lorsque celle-ci est en marche. 6. Garder les gens et les animaux à une distance sécuritaire de la machine. 7. Ne jamais fumer lors du plein d'essence. 8. Immobiliser la machine de façon sécuritaire avant de travailler sous celle-ci. 9. Garder toute connection et fil électrique au sec et en bonne condition. 10. Afin d'éviter tout risque d'accident grave, ne jamais souffler en direction des gens, animaux ou vers les propriétés. Le port des équipements de sécurité est obligatoire lorsque vous opérerez la machine. 11. Reviser annuellement le manual d'opération.

NC13-33-0108


REMEMBER - If safety signs have been damaged, removed, become illegible or parts replaced without safety signs, new signs must be applied. New safety signs are available from your authorized dealer.

The types of safety signs and locations on the equipment are shown in the illustrations that follow. Good safety requires that you familiarize yourself with the various safety signs, the type of warning and the area, or particular function related to that area, that requires your SAFETY AWARENESS.

- Think SAFETY! Work SAFELY!

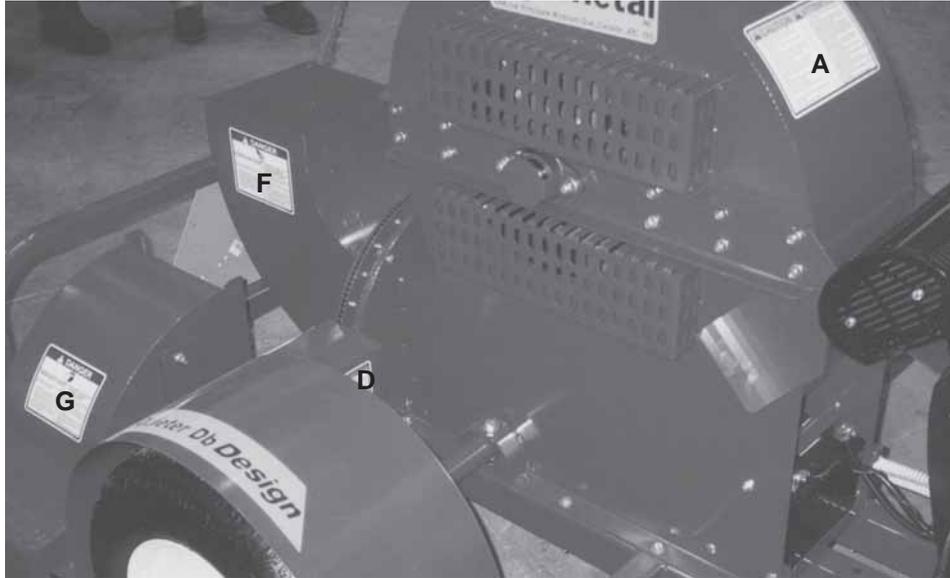

B

 WARNING  AVERTISSEMENT	
	
ROTATING PART HAZARD KEEP AWAY	PIÈCES EN MOUVEMENT RESTER ÉLOIGNÉ
<p>To prevent serious injury or death from rotating parts:</p> <ol style="list-style-type: none"> 1. Place all controls in neutral or off, stop engine or motor, set park brake, remove ignition key or disable power source and wait for all moving parts to stop before servicing, adjusting, repairing or unplugging. 2. Install and secure all guards before operating. 3. Do not operate with rotating parts exposed. 	<p>À défaut de suivre ces instructions, cela pourrait entraîner de sérieuses blessures ou même la mort.</p> <ol style="list-style-type: none"> 1. Arrêter le moteur, placer tous les contrôles à la position "neutre" enlever la clé du contact et attendre que toutes les places soient au point mort avant de faire tout ajustement, réparation ou de débloquer la machine. 2. Installer tous les écrans protecteurs avant de mettre la machine en fonction. 3. Ne jamais opérer la machine sans écran protecteur.
	<small>01-60-0115</small>

REMEMBER - If safety signs have been damaged, removed, become illegible or parts replaced without safety signs, new signs must be applied. New safety signs are available from your authorized dealer.

The types of safety signs and locations on the equipment are shown in the illustrations that follow. Good safety requires that you familiarize yourself with the various safety signs, the type of warning and the area, or particular function related to that area, that requires your SAFETY AWARENESS.

- Think SAFETY! Work SAFELY!



WARNING

MISSING SHIELD HAZARD

To prevent serious injury or death from exposed hazard:

1. Install and secure shields before operating.
2. Keep hands, feet, hair and clothing away from moving parts.

AVERTISSEMENT

GARDE ABSENT

À défaut de suivre ces instructions, cela pourrait entraîner de sérieuses blessures ou même la mort.

1. Installer les gardes de façon sécuritaire avant la mise en marche de la machine.
2. Garder les mains, pieds, cheveux et vêtements éloignés des éléments mobiles.

01-60-0070

WARNING AVERTISSEMENT	
ROTATING PART HAZARD KEEP AWAY	PIÈCES EN MOUVEMENT RESTER ÉLOIGNÉ
To prevent serious injury or death from rotating parts:	À défaut de suivre ces instructions, cela pourrait entraîner de sérieuses blessures ou même la mort.
<ol style="list-style-type: none"> 1. Place all controls in neutral or off, stop engine or motor, set park brake, remove ignition key or disable power source and wait for all moving parts to stop before servicing, adjusting, repairing or unplugging. 2. Install and secure all guards before operating. 3. Do not operate with rotating parts exposed. 	<ol style="list-style-type: none"> 1. Arrêter le moteur, placer tous les contrôles à la position "neutre" enlever la clé du contact et attendre que toutes les places soient au point mort avant de faire tout ajustement, réparation ou de débloquer la machine. 2. Installer tous les écrans protecteurs avant de mettre la machine en fonction. 3. Ne jamais opérer la machine sans écran protecteur.
	01-60-0110

REMEMBER - If safety signs have been damaged, removed, become illegible or parts replaced without safety signs, new signs must be applied. New safety signs are available from your authorized dealer.

The types of safety signs and locations on the equipment are shown in the illustrations that follow. Good safety requires that you familiarize yourself with the various safety signs, the type of warning and the area, or particular function related to that area, that requires your SAFETY AWARENESS.

- Think SAFETY! Work SAFELY!

E

 <h1 style="margin: 0;">DANGER</h1>	
	
<p style="text-align: center;">FIRE HAZARD NO SMOKING</p> <p>To prevent serious injury or death from fire:</p> <ol style="list-style-type: none"> 1. Do not smoke when refueling. 2. Keep sparks, flames and hot material away from flammable substances. 3. Stop engine five minutes before refueling. 	<p style="text-align: center;">RISQUE D'INCENDIE DEFENSE DE FUMÉ</p> <p>À défaut de suivre ces instructions, cela pourrait entraîner de sérieuses blessures ou même la mort.</p> <ol style="list-style-type: none"> 1. Ne pas fumer lors du remplissage. 2. Garder les flammes et toute matière inflammable hors de portée. 3. Arrêter le moteur cinq minutes avant de refaire le plein. <small>NC-13-33-0109</small>


F

 <h1 style="margin: 0;">DANGER</h1>	
	
<p style="text-align: center;">BLOWER BLADE HAZARD</p> <p>To prevent serious injury or death from blower blade hazard:</p> <ol style="list-style-type: none"> 1. Do not put hands or feet into blower opening when the engine is running. 2. Do not place hands or feet into blower openings when engine running. Keep others away. 3. Stop engine, place all controls in neutral, set park brake, remove ignition key and wait for all moving parts to stop before servicing, adjusting, repairing or unplugging machine. 4. Do not operate with blower opening exposed. 	<p style="text-align: center;">PROPULSEUR EN ROTATION RISQUE DE BLESSURE GRAVE</p> <p>À défaut de suivre ces instructions, cela pourrait entraîner de sérieuses blessures ou même la mort.</p> <ol style="list-style-type: none"> 1. Ne jamais mettre les mains ou les pieds dans l'ouverture du souffleur lorsqu'il est en fonction. 2. Ne jamais placer les mains ou les pieds dans l'ouverture du souffleur lorsque le moteur est en fonction. Garder les gens éloignés. 3. Arrêter le moteur, placer tous les contrôles à la position "neutre", enlever la clé du contact et attendre que toutes les places soient au point mort avant de faire tout ajustement, réparation ou de débloquer la machine. 4. Ne jamais souffler en direction des gens. <small>NC13-33-0112</small>

REMEMBER - If safety signs have been damaged, removed, become illegible or parts replaced without safety signs, new signs must be applied. New safety signs are available from your authorized dealer.

The types of safety signs and locations on the equipment are shown in the illustrations that follow. Good safety requires that you familiarize yourself with the various safety signs, the type of warning and the area, or particular function related to that area, that requires your SAFETY AWARENESS.

- Think SAFETY! Work SAFELY!

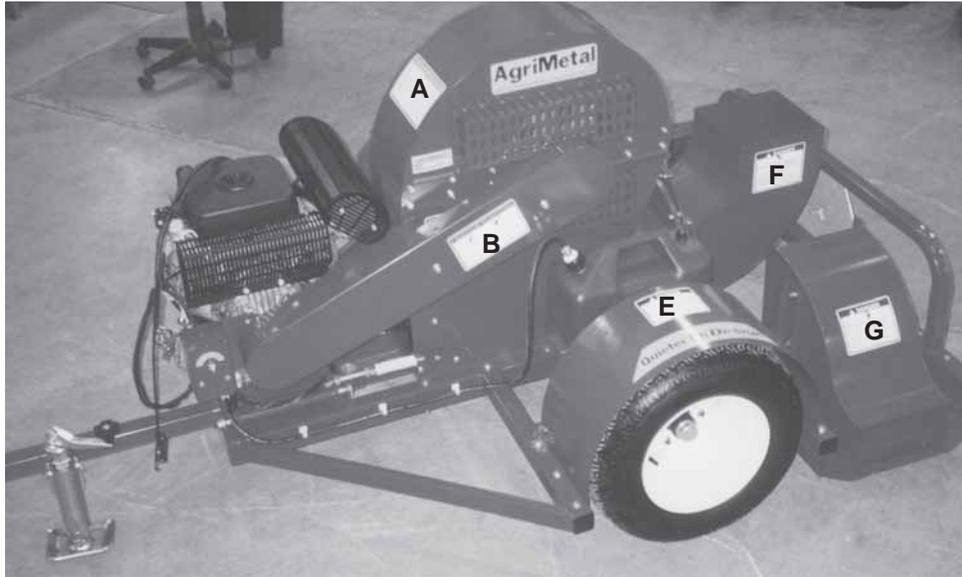

G

 DANGER	
	
<p>THROWN OBJECT HAZARD</p> <p>To prevent serious injury or death from a thrown object:</p> <ol style="list-style-type: none"> 1. Stop engine, place all controls in neutral, set park brake, remove ignition key and wait for all moving parts to stop before servicing, adjusting, repairing or unplugging machine. 2. Do not direct discharge duct toward people, animals or property. Always wear appropriate safety gear. Keep hands and feet out of discharge openings. 3. Keep others away. 	<p>RISQUE D'OBJETS PROJÉTÉS</p> <p>À défaut de suivre ces instructions, cela pourrait entraîner de sérieuses blessures ou même la mort.</p> <ol style="list-style-type: none"> 1. Arrêter le moteur, placer tous les contrôles à la position "neutre", enlever la clé du contact et attendre que toutes les places soient au point mort avant de faire tout ajustement, réparation ou de débloquer la machine. 2. Afin d'éviter tout risque d'accident grave, ne jamais souffler en direction des gens, des animaux ou vers les propriétés. Le port des équipements de sécurité est obligatoire lorsque vous opérez la machine. 3. Garder les gens éloignés de la machine. <p style="text-align: right; font-size: small;">NC13-33-0110</p>

REMEMBER - If safety signs have been damaged, removed, become illegible or parts replaced without safety signs, new signs must be applied. New safety signs are available from your authorized dealer.

4 ASSEMBLING

4.1 MACHINE ASSEMBLY

The machine is shipped from the factory in a partially disassembled configuration and attached to a pallet that provides for easy moving and handling. Always use tools, equipment and forklifts of appropriate size and capacity for the job. Always use 2 men when lifting, moving and assembling the machine.

When the machine is shipped, follow this procedure when preparing for the customer:

1. Clear the area of bystanders especially small children before starting.
2. Remove the pallet tie-downs.
3. Use a forklift to lift the pallet/machine from the truck. Carry the load close to the ground as it is moved to the assembly area and positioned.
4. Remove plastic wrap.
5. Remove machine, hitch and control tie-downs and lay-out.

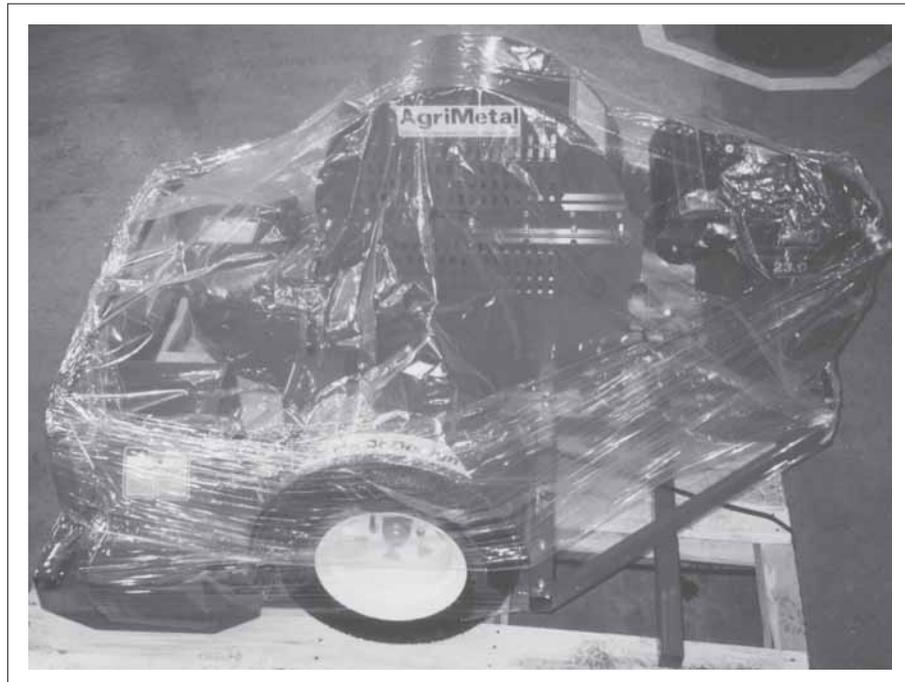


Fig. 1 SHIPPING CONFIGURATION



Fig. 2 LAYOUT

- Slide the hitch into the frame and tighten fasteners to their specified torque.

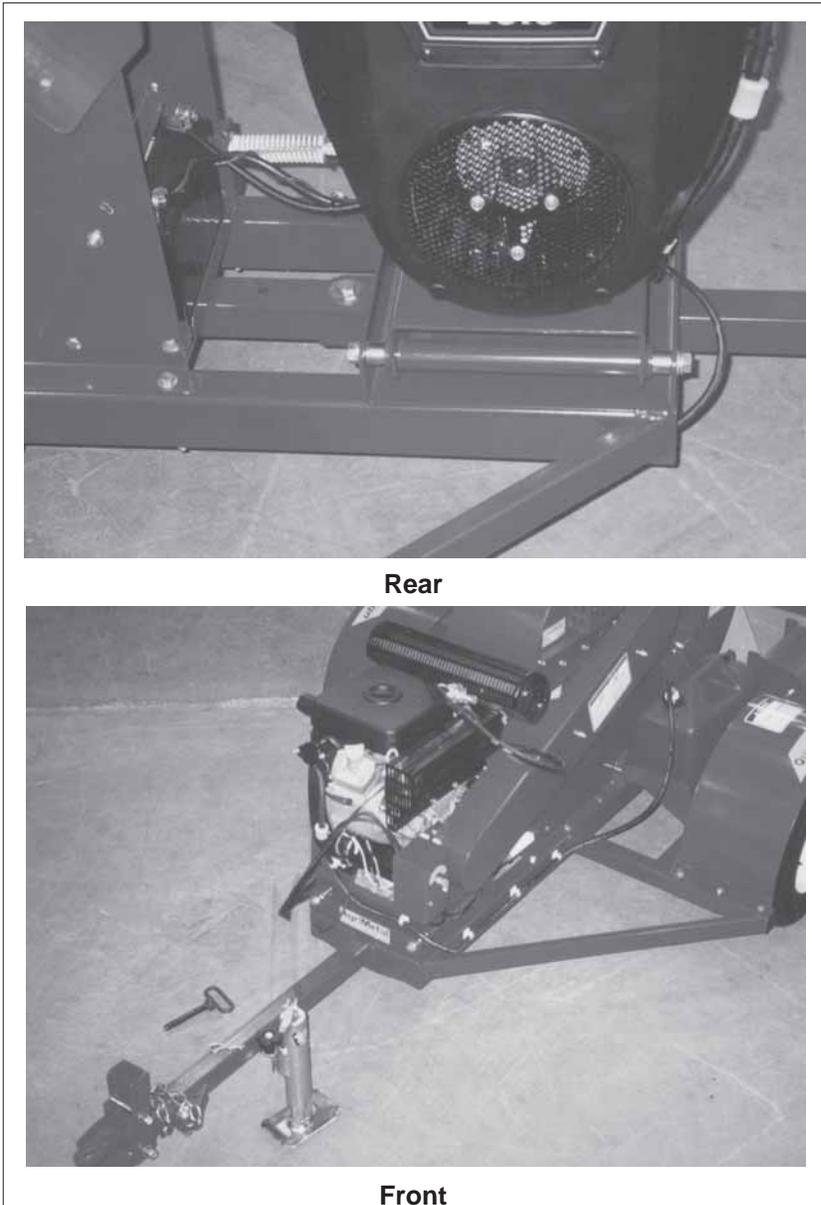


Fig. 3 HITCH

- Lay the control assembly to the side so it can be attached to the towing tractor.



Fig. 4 CONTROL ASSEMBLY

8. Connect the cables to the battery posts. Be sure to connect the black cable to the negative post.



Fig. 5 BATTERY CABLES

5 OPERATION



OPERATING SAFETY

- Please remember it is important that you read and heed the safety signs on the Leaf Blower. Clean or replace all safety signs if they cannot be clearly read and understood.
- If a safety shield or guard is removed for any reason, it must be replaced before the machine is again operated.
- Always use two people to handle heavy, unwieldy components during assembly, installation, removal or moving.
- Place all controls in neutral, stop engine, set park brake, remove ignition key and wait for all moving parts to stop before servicing, adjusting, repairing or unplugging.
- Do not allow riders on the machine or tow vehicle at any time. There is no safe place for any riders.
- Do not allow anyone who is not familiar with the safety rules and operation instructions to use this machine.
- Never allow children to operate or be around this machine.
- Do not reach into blower openings when the engine is running. Clear the work area of objects which might be picked up and snagged or entangled in the machine.
- Clear the work area of objects which might be picked up and snagged or entangled in the machine.
- Do not reach into blower openings when the engine is running. Keep others away also.
- Keep hands, feet, hair, jewellery, and clothing away from all moving and/or rotating parts.
- Do not direct the air stream toward people, animals or buildings to prevent injury or damage.
- Do not place hands, feet or other body parts into air stream.

5.1 TO THE NEW OPERATOR OR OWNER

AgriMetal Pull-Type Leaf Blowers are designed to quickly and efficiently, blow away leaves, cuttings and other debris. The material is conveyed on a stream of high velocity air to remove it from the area of concern. When the material is removed, it gives a neat, professional look to the working area.

In addition to the design and configuration of equipment, hazard control and accident prevention are dependent upon the awareness, concern, prudence and proper training of personnel involved in the operation, transport, maintenance and storage of equipment. It is the responsibility of the owner or operator to read this manual and to train all other operators before they start working with the machine.

Follow all safety instructions exactly. Safety is everyone's business. By following recommended procedures, a safe working environment is provided for the operator, bystanders and the area around the worksite. Untrained operators are not qualified to operate the machine.

Many features incorporated into this machine are the result of suggestions made by customers like you. Read this manual carefully to learn how to operate the machine safely and how to set it to provide maximum field efficiency. By following the operating instructions in conjunction with a good maintenance program, your Pull-Type Leaf Blower will provide many years of trouble-free service.

5.2 MACHINE COMPONENTS

The AgriMetal Pull-Type Leaf Blower is a large blower mounted on a trailer for moving debris on a stream of air. The air stream can be directed to the right, left or straight up depending on the central duct position. A gas engine on the front frame power the blower through a V belt drive. The throttle and duct position controls are located on an umbilical cord that extends to the towing vehicle. An electric solenoid moves the center duct to the desired position.

- A Discharge Ducts**
- B Center Duct**
- C Blower**
- D Gas Engine**
- E V Belt Drive**
- F Duct Position Drive**
- G Umbilical Cord**
- H Controls**

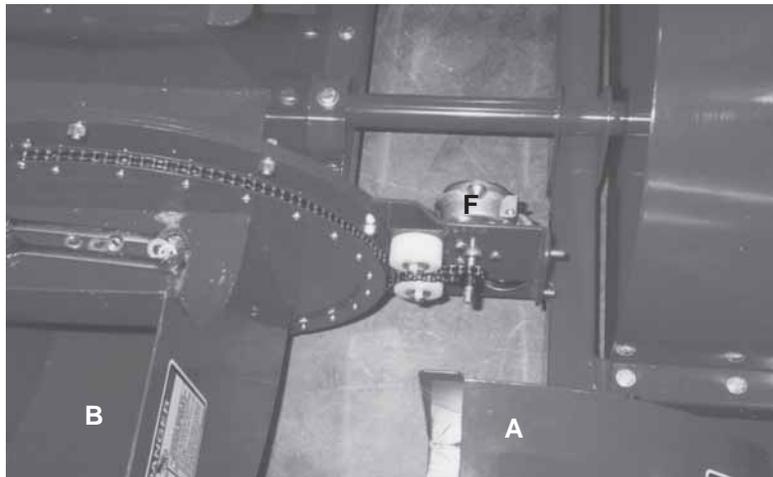
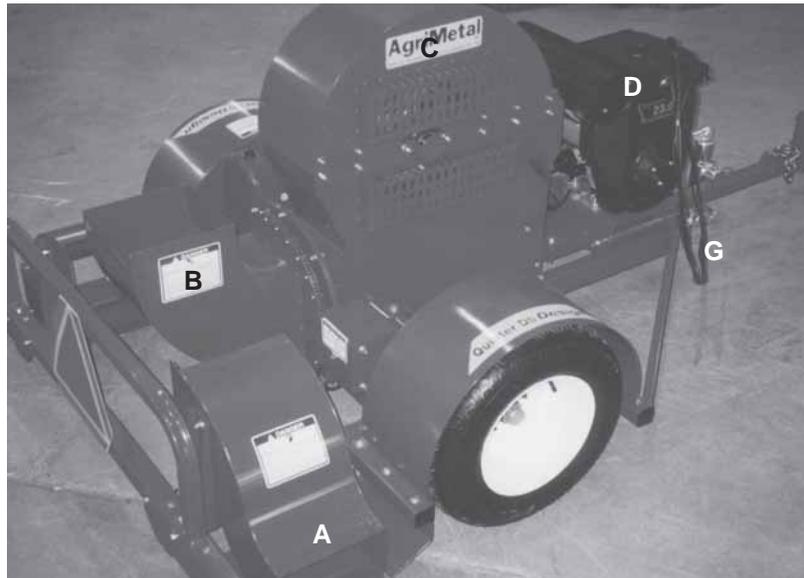
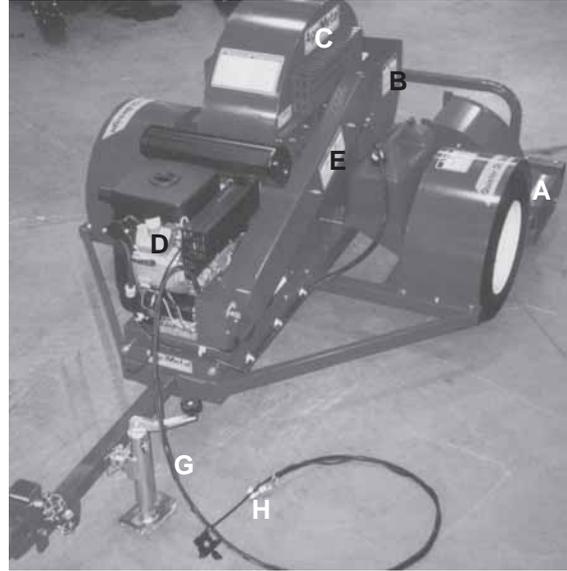


Fig. 6 PRINCIPLE COMPONENTS

5.3 BREAK-IN

Although there are no operational restrictions on the Blower when it is used for the first time, it is recommended that the following mechanical items be checked:

A. After operating for 1 hour:

1. Check alignment of pulleys and sprockets. Align as required.
2. Check belt tension and alignment. Adjust as required.
3. Torque all fasteners and hardware.
4. Check condition of blower bearings.
5. Check tire pressure. Inflate as required.
6. Check engine fluid levels. Top up as required.

B. After operating for 10 hours:

1. Repeat steps 1 through 8 listed above. (Section A).
2. Change engine oil.
3. Go to the normal servicing and maintenance schedule as defined in the Maintenance Section.

5.4 PRE-OPERATION CHECKLIST

Efficient and safe operation of the AgriMetal Pull-Type Leaf Blower requires that each operator reads and understands the operating procedures and all related safety precautions outlined in this section. A pre-operation checklist is provided for the operator. It is important for both personal safety and for maintaining the machine in good mechanical condition that this checklist be followed.

Before operating the Blower and each time thereafter, the following areas should be checked off:

1. Lubricate the machine per the schedule outline in the Maintenance Section.
2. Check the tension and alignment of all belts and pulleys. Adjust tension and align as required.
3. Check that all bearings turn freely. Replace any that are rough or seized.
4. Make sure that all guards and shields are in place, secured and functioning as designed.
5. Clean the slotted guards over the blower intake guards.
6. Check engine oil and fuel level. Top up as required.

5.5 CONTROLS

Before starting to work, all operators should familiarize themselves with the location and function of the controls.

1. Gas Engine:

Read the engine manufacturers operator's manual before starting for more detailed instructions.

a. Ignition Switch:

This key operated switch controls the electric power to the engine.

OFF - Turn the key fully counterclockwise to stop the fuel flow and turn the engine off.

RUN - Turn clockwise on detent to the run position. This is the position where the engine will continue to run.

START - Turn fully clockwise to the last spring-loaded detent position to engage the starter solenoid and start the engine. Release the key when the engine starts and it will return to the RUN position.

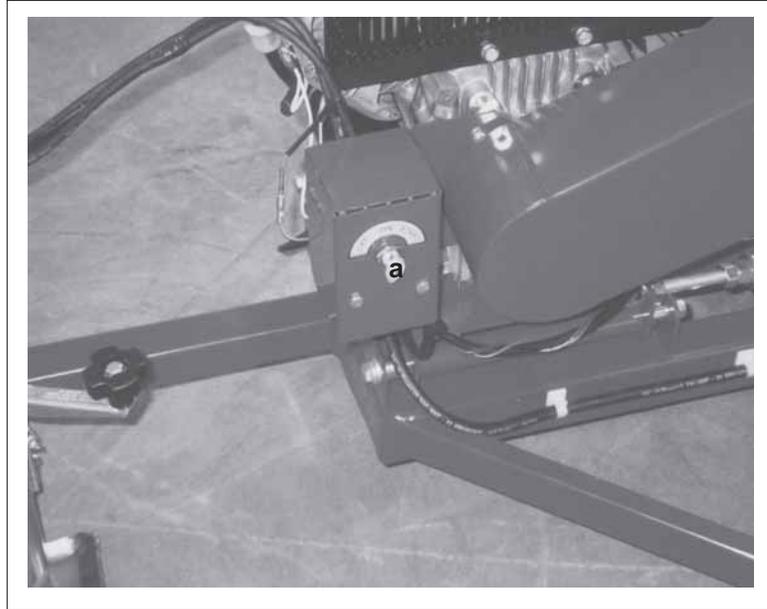


Fig. 7 IGNITION SWITCH

b. Choke:

This wire loop controls the position of the choke. Push the loop in to close the choke for starting when the engine is cold. Pull the loop out to open the choke as the engine warms. Always pull the loop fully out when operating the machine.

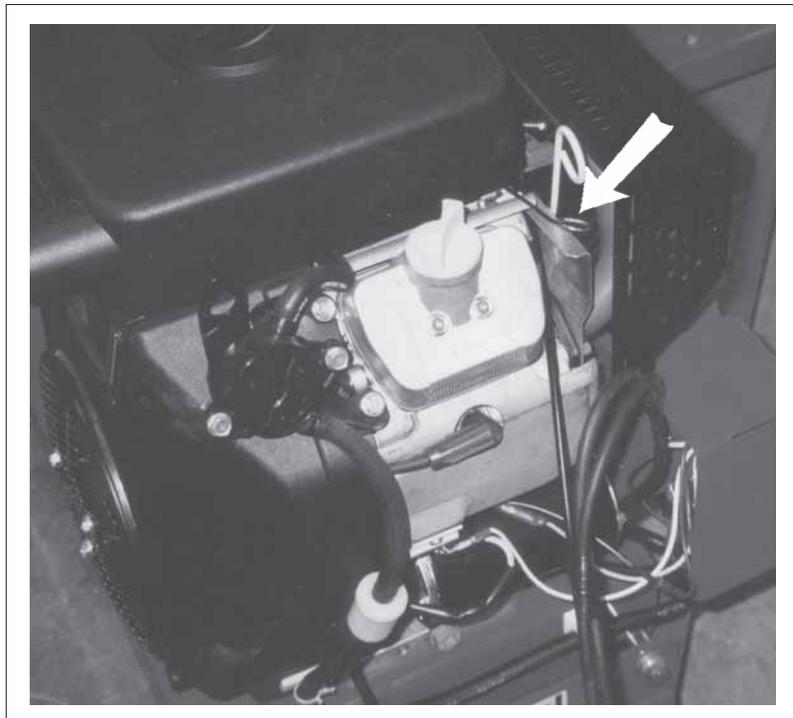


Fig. 8 ENGINE

2. **Control Module:**
Each machine is equipped with a remote control module that attaches to the power unit. Be familiar with each control before starting.

- a. **Rotary Switch:**
This rotary switch controls the power to the duct position actuator. Turn the switch to the right and hold to move the center duct to the right. Turn and hold to the left to move the center duct to the left. Release the switch and the center duct will stop moving.



Fig. 9 CONTROL MODULE

- b. **Throttle:**
This lever controls the throttle position on the gas engine through a push-pull cable. Move the lever toward the cable to increase engine RPM and away to decrease.

5.6 ATTACHING/UNHOOKING

The Leaf Blower should always be located on a level, dry area that is free of debris and other foreign objects. When attaching the machine to a tractor or a utility cart, follow this procedure:

1. Clear the area of bystanders, especially small children.
2. Make sure there is enough room and clearance to safely back up to the machine.
3. While backing up, align the hitch with the drawbar.
4. Extend the hitch when attaching to a tow vehicle if required.
5. Turn the hitch over to reverse the clevis bracket if required to level the frame.



Fig. 10 HITCH ADJUSTMENT

6. Stop tow vehicle, set park brake, remove ignition key and wait for all moving parts to stop before dismounting.
7. Use a drawbar pin with provisions for a mechanical retainer. Install the retainer.

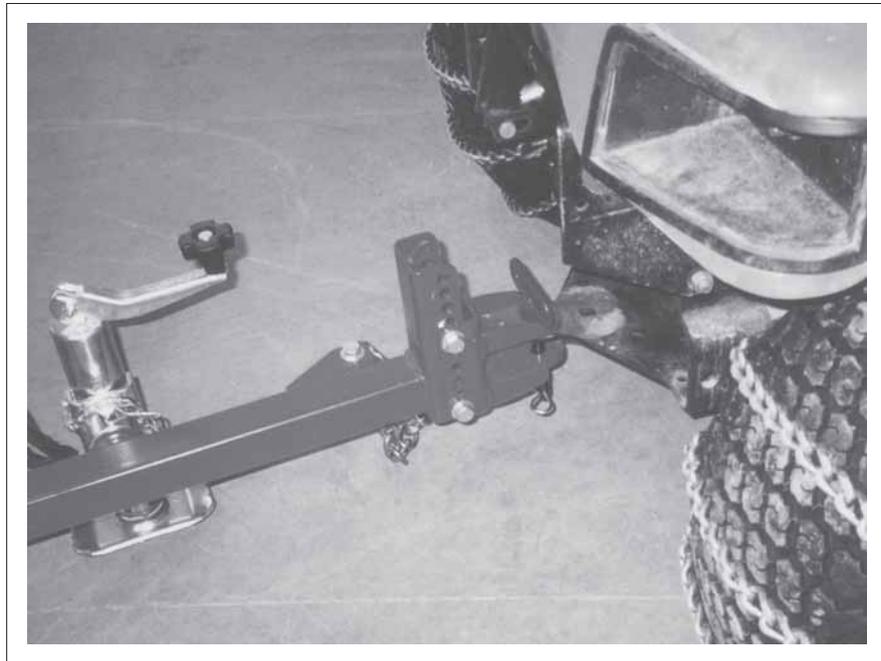


Fig. 11 DRAWBAR PIN

8. Attach the safety chain around the drawbar cage to prevent unexpected separation.

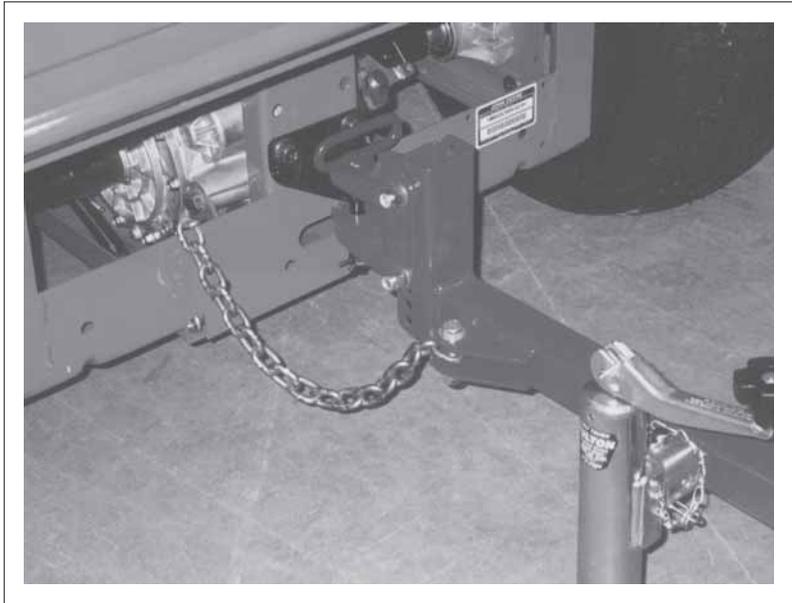


Fig. 12 SAFETY CHAIN

9. Pull anchor pin on jack, remove jack and mount to storage bracket.

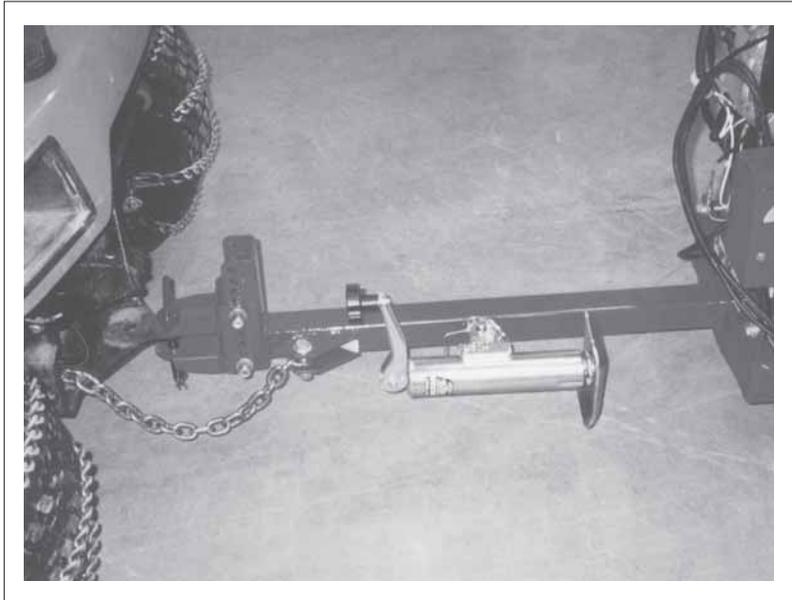


Fig. 13 STOWED


10. Level The Frame:

- a. Move the unit to a hard level surface such as asphalt or concrete.
- b. Use 2 measuring tapes to measure the height of the bottom of the discharge duct to the ground. They must be at the same height to obtain the best performance.
- c. Use the adjustable clevis on the front of the hitch to set the angle of the frame.

IMPORTANT

The discharge ducts are designed to precisely direct the air stream horizontally to give optimum performance. The air is directed slightly downward to get under the debris, lift it up and move it away. If the frame is not level, the air stream will be directed over the debris and not perform as expected.

- d. Or remove hitch from frame and turn it over to reverse clevis bracket.

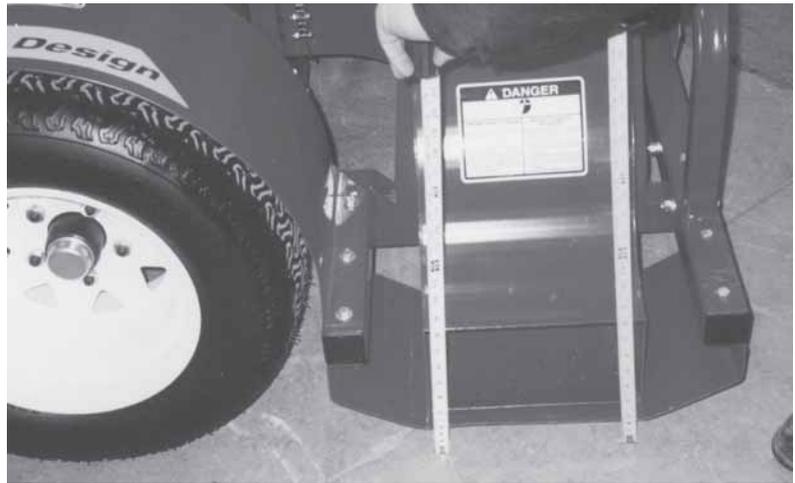

Measuring



High Clevis



Low Clevis

Fig. 14 LEVELING FRAME

11. Attach the control module mounting plate to an appropriate location on tow vehicle frame, fender or cab.
12. Secure with brackets, plastic ties or other means.
13. Reverse the above procedure when unhooking from the tractor.



Fig. 15 CONTROL MODULE

5.7 FIELD OPERATION



OPERATING SAFETY

- Please remember it is important that you read and heed the safety signs on the Leaf Blower. Clean or replace all safety signs if they cannot be clearly read and understood.
- If a safety shield or guard is removed for any reason, it must be replaced before the machine is again operated.
- Always use two people to handle heavy, unwieldy components during assembly, installation, removal or moving.
- Place all controls in neutral, stop engine, set park brake, remove ignition key and wait for all moving parts to stop before servicing, adjusting, repairing or unplugging.
- Do not allow riders on the machine or tow vehicle at any time. There is no safe place for any riders.
- Do not allow anyone who is not familiar with the safety rules and operation instructions to use this machine.
- Never allow children to operate or be around this machine.
- Do not reach into blower openings when the engine is running. Clear the work area of objects which might be picked up and snagged or entangled in the machine.
- Clear the work area of objects which might be picked up and snagged or entangled in the machine.
- Do not reach into blower openings when the engine is running. Keep others away also.
- Keep hands, feet, hair, jewellery, and clothing away from all moving and/or rotating parts.
- Do not direct the air stream toward people, animals or buildings to prevent injury or damage.
- Do not place hands, feet or other body parts into air stream.

Although the Leaf Blower is easy to use, each operator should review this section to familiarize himself with the detailed safety and operating procedures. When using the machine, follow this procedure:

1. Clear the area of bystanders, especially small children.
2. Review and follow the Pre-Operation Checklist (see Section 5.4).
3. Attach the machine to the tow vehicle (see Section 5.6). Be sure the frame is level.
4. Transport to the working area (refer to Section 5.8).

5. **Starting Machine:**

- a. Stop tow vehicle engine, set park brake, remove ignition key and wait for all moving parts to stop before dismounting.
- c. Close the choke if the engine is cold.
- d. Move the throttle to its 1/4 throttle position.
- e. Use the ignition switch on the front frame to start the engine.



Fig. 16 STARTING ENGINE

- f. Run the engine for a few minutes to allow it to warm.
 - g. Gradually open the choke.
 - h. Increase throttle setting to maximum speed for operation.
 - i. Start tow vehicle engine to start working.
6. Use the rotary switch to set the position of the center duct.
7. **Travel Speed:**
Set the travel speed appropriate for the job being done. Travel faster if all the debris is being blown away. Slow down if some debris is not being removed.

8. **Center Duct:**

The Blower is designed with a moveable center duct that can be used to direct the air to the left, up or right. Use the spring-loaded rotary switch on the control module to change the duct position.

NOTE

The machine ignition switch must be in the run position when moving the center duct.




Control



Left



Up

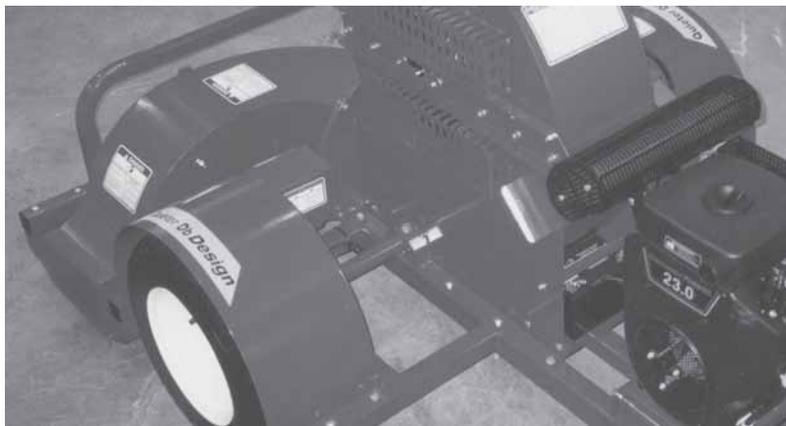

Right

Fig. 17 CASTOR SHAFTS

9. **Center Shroud:**

- a. An optional shroud is available to place over the center duct when the duct is pointing up to direct the air stream straight down.
- b. Direct the center duct up to remove material from brush or trees.



Fig. 18 SHROUD

10. **Blower Engine Operating RPM:**

Run the blower engine at a fast enough speed to get the job done.

- 11. Clean the slotted metal intake guards as required to insure ample flow of air to the fan.
- 12. Always try to blow with the wind. Blowing against the wind can result in lifting the material into the wind and having it blown over a wider area.



Fig. 19 INTAKE GUARDS

13. Application Hints:

- a. Cleaning fairways or large open areas:
 - i. When moving the material to one side, start at the opposite side and blow toward the receiving side. Use the center duct to change the air flow direction when coming back.
 - ii. When moving the material to all sides, start in the middle and move outward toward the edges while going around.
- b. Cleaning parking lots or other paved surfaces:
 - i. Blow only the area that needs cleaning.
 - ii. Run only at a speed necessary to move the debris.
 - iii. Direct the air stream with care. The blower can produce an air flow speed in excess of 125 mph. At this speed, it can pick up small solid objects and move them over 100 feet. People, pets, animals, building, vehicle or other objects can be hit by these objects. Dust or sand can be blown in peoples eyes.
 - iv. It is best to stop for a short time to allow people to pass before running machine again.
- c. Drying wet areas:
 - i. Determine the area to be dried.
 - ii. Drive slowly past the area that is wet.
 - iii. Repeat the drive-by until the moisture is gone.

 **DANGER**



THROWN OBJECT HAZARD
To prevent serious injury or death from a thrown object:

1. Stop engine, place all controls in neutral, set park brake, remove ignition key and wait for all moving parts to stop before servicing, adjusting, repairing or unplugging machine.
2. Do not direct discharge duct toward people, animals or property. Always wear appropriate safety gear. Keep hands and feet out of discharge openings.
3. Keep others away.

RISQUE D'OBJETS PROJÉTÉS
À défaut de suivre ces instructions, cela pourrait entraîner de sérieuses blessures ou même la mort.

1. Arrêter le moteur, placer tous les contrôles à la position "neutre", enlever la clé du contact et attendre que toutes les places soient au point mort avant de faire tout ajustement, réparation ou de débloquer la machine.
2. Afin d'éviter tout risque d'accident grave, ne jamais souffler en direction des gens, des animaux ou vers les propriétés. Le port des équipements de sécurité est obligatoire lorsque vous opérez la machine.
3. Garder les gens éloignés de la machine.

5.8 TRANSPORTING



TRANSPORT SAFETY

- Comply with state and local laws governing highway safety and movement of machinery on public roads.
- The use of flashing amber lights is acceptable in most localities. However, some localities prohibit their use. Local laws should be checked for all highway lighting and marking requirements.
- At all times when driving the tow vehicle and equipment on the road or highway under 20 mph (32 kph), use flashing amber warning lights and a slow moving vehicle (SMV) identification emblem. Do not exceed 20 mph (32 kph). Reduce speed on rough roads and surfaces.
- Plan your route to avoid heavy traffic.
- Use a drawbar pin with provisions for a retainer. Install the retainer.
- Do not drink and drive.
- Attach safety chain between tow vehicle and machine before transporting.
- Be a safe and courteous driver. Always yield to oncoming traffic in all situations, including narrow bridges, intersections, etc. Watch for traffic when operating near or crossing roadways.
- Turn into curves or go up or down hills only at a low speed and at a gradual steering angle. Make certain that at least 20% of the tow vehicle's weight is on the front wheels to maintain safe steering. Slow down on rough or uneven surfaces.
- Never allow riders on either tow vehicle or machine.
- Install lighting bar before transporting.

When transporting the machine, review and follow these instructions:

1. Clear the area of bystanders, especially small children.
2. Be sure that the towing unit has sufficient size and mass to control the Leaf Blower during transport.
3. Insure that the machine is securely attached to the tow vehicle with a mechanical retainer through the drawbar pin. Always use a safety chain between the tow vehicle and machine.
4. Make sure the SMV (Slow Moving Vehicle) emblem and all the lights and reflectors that are required by the local highway authorities are in place, are clean and can be seen clearly by all overtaking and oncoming traffic. Install the optional lighting bar before transporting on a public road.
5. Always use hazard flashers on the tow vehicle when transporting unless prohibited by law.
6. Do not allow riders.
7. Never exceed a safe travel speed. Never travel faster than 20 mph (32 km/h). The ratio of the tow vehicle weight to the machine weight plays an important role in defining acceptable travel speed. The following table summarized the weight ratio to travel speed.
8. Always shift to a lower gear when going down hill to use the engine as a restraining force.
9. Apply the brakes carefully to prevent jackknifing.
10. Never disengage tow vehicle drivetrain and coast down hills. Always keep tow vehicle in gear.

Table 1 Travel Speed vs. Weight Ratio

Road Speed	Weight of fully equipped or loaded implement(s) relative to weight of Towing machine
Up to 32 km/h (20 mph)	1 to 1, or less
Up to 16 km/h (10 mph)	2 to 1, or less
Do not tow	More than 2 to 1

5.9 STORAGE



STORAGE SAFETY

- Store the unit in an area away from human activity.
- Do not permit children to play on or around the stored machine.
- Store the unit in a dry, level area. Support the frame with planks if required.

At the end of the season, the machine should be thoroughly inspected and prepared for storage. Repair or replace any worn or damaged components to prevent any unnecessary down time at the beginning of the next season. Follow this procedure:

1. Thoroughly wash the machine with a pressure washer or water hose to remove all dirt, mud, debris or residue.
2. Make sure all the water drains out of the blower and duct compartments.
3. Lubricate all grease points to remove any water residue from washing.
4. Coat the roller chain with a good quality chain lubricant to prevent rusting.
5. Remove any material that has become entangled around any moving part.
6. Run the machine for a couple of minutes at low RPM to dry the inside of the blower. Direct the intake air to flow through both ducts to dry them also. Stop the center duct pointing to the side to minimize moisture retention.
7. Touch up all paint nicks and scratches to prevent rusting.
8. Move the machine to its storage area.
9. Store in a dry, level spot.
10. Store in an enclosed building if possible. If space is not available, cover with a waterproof tarpaulin and tie down securely.
11. Unhook from the tow vehicle (see Section 5.6).
12. Place planks under the jack for added support if required.
13. Store in an area away from human activity.
14. Do not allow children to play around the stored unit.



Fig. 20 STORED

6 SERVICE AND MAINTENANCE



MAINTENANCE SAFETY

- Good maintenance is your responsibility. Poor maintenance is an invitation to trouble.
- Follow good shop practices.
 - Keep service area clean and dry.
 - Be sure electrical outlets and tools are properly grounded.
 - Use adequate light for the job at hand.
- Make sure there is plenty of ventilation. Never operate an engine in a closed building. The exhaust fumes may cause asphyxiation.
- Before working on this machine, shut off the engine, set the brakes, and remove the ignition keys.
- Never work under equipment unless it is blocked securely.
- Always use personal protection devices such as eye, hand and hearing protectors, when performing any service or maintenance work.
- Where replacement parts are necessary for periodic maintenance and servicing, genuine factory replacement parts must be used to restore your equipment to original specifications. The manufacturer will not be responsible for injuries or damages caused by use of unapproved parts and/or accessories.
- A fire extinguisher and first aid kit should be kept readily accessible while performing maintenance on this equipment.
- Periodically tighten all bolts, nuts and screws and check that all cotter pins are properly installed to ensure unit is in a safe condition.
- When completing a maintenance or service function, make sure all safety shields and devices are installed before placing unit in service.

6.1 SERVICE

6.1.1 FLUIDS AND LUBRICANTS

1. **Grease:**
Use an SAE multipurpose high temperature grease with extreme pressure (EP) performance. Also acceptable is an SAE multipurpose lithium base grease.
2. **Gasoline:**
Use a standard unleaded gasoline for all operating conditions. Do not use gasoline with an ethanol blend.

Capacity: 1.7 gal (6.5 litres).

3. **Engine Oil:**
Use an SAE 10W30 multi-viscosity oil meeting the American Petroleum Institute (API) classification of SF or SG for normal operating temperatures. Consult the engine manual for unusual operating conditions. Do not mix oil types or viscosities.

Crankcase Capacity:

1.6 US qt (1.5 liters).

4. **Storing Lubricants:**
Your machine can operate at top efficiency only if clean lubricants are used. Use clean containers to handle all lubricants. Store them in an area protected from dust, moisture and other contaminants.

6.1.2 GREASING

Use the Maintenance Checklist provided to keep a record of all scheduled maintenance.

1. Use a hand-held grease gun for all greasing.
2. Wipe grease fitting with a clean cloth before greasing, to avoid injecting dirt and grit.
3. Replace and repair broken fittings immediately.
4. If fittings will not take grease, remove and clean thoroughly. Also clean lubricant passageway. Replace fitting if necessary.

6.1.3 SERVICING INTERVALS

The period recommended is based on normal operating conditions. Severe or unusual conditions may require more frequent lubrication or oil changes.

8 Hours or Daily

1. Clean blower air intake guard slots on both sides.

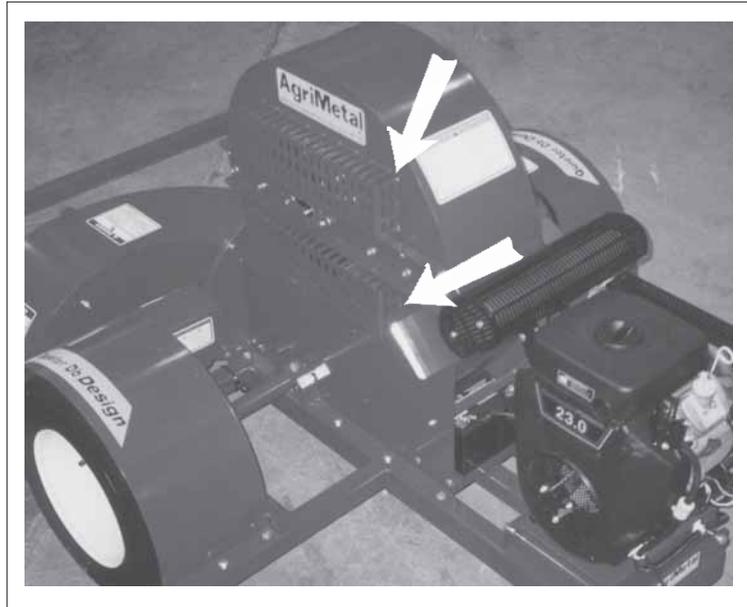


Fig. 21 GUARD SLOTS (TYPICAL)

2. Check engine oil level.

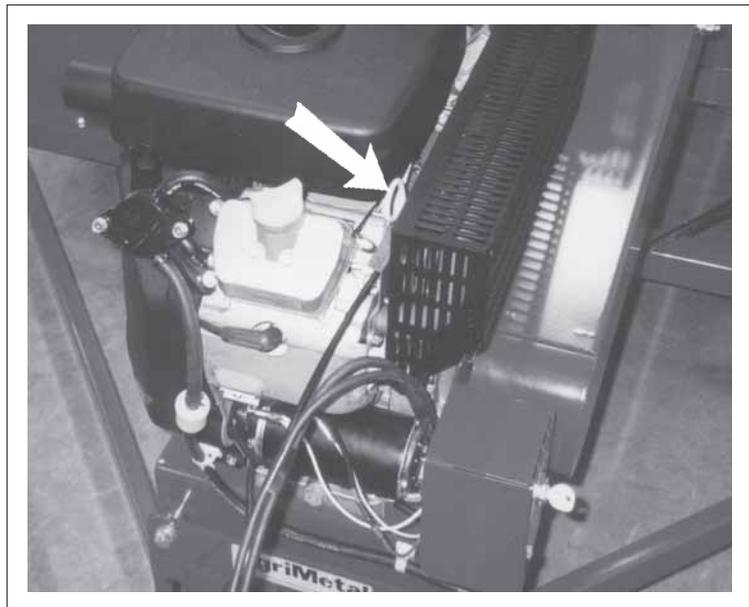


Fig. 22 DIPSTICK

3. Check fuel level.

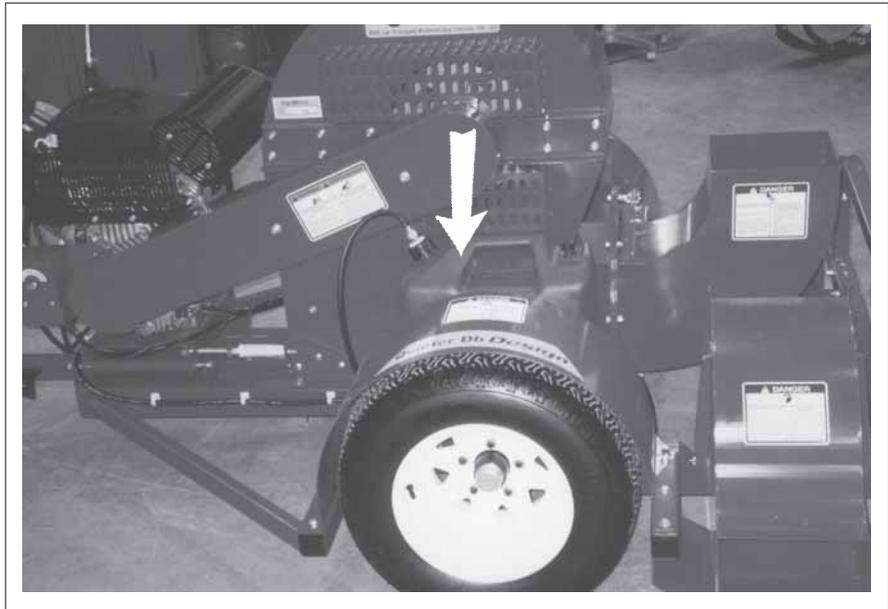


Fig. 23 GAS TANK

Monthly

1. Check blower drive belt tension. Be sure spring length is 4 inches (102 mm).

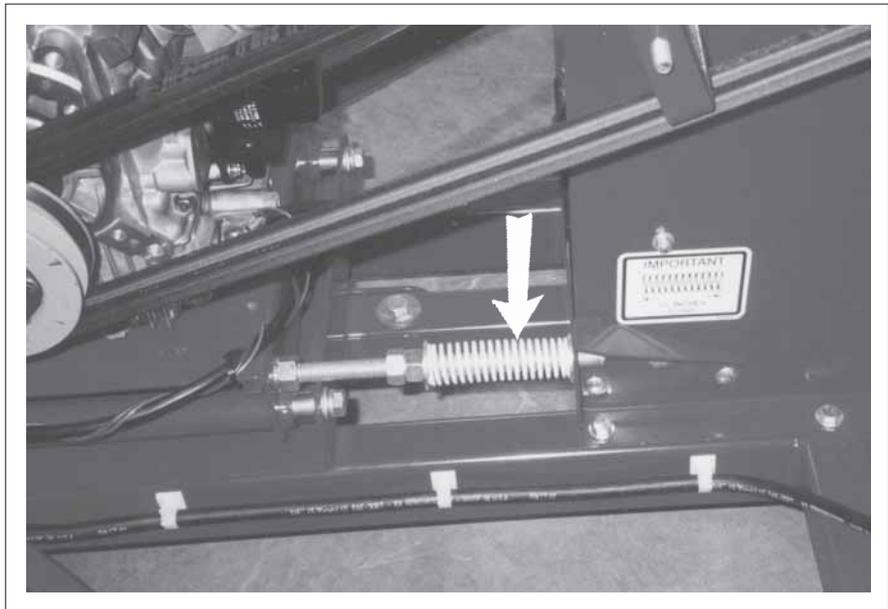


Fig. 24 BLOWER BELT TENSION

100 Hours

1. Change engine oil.

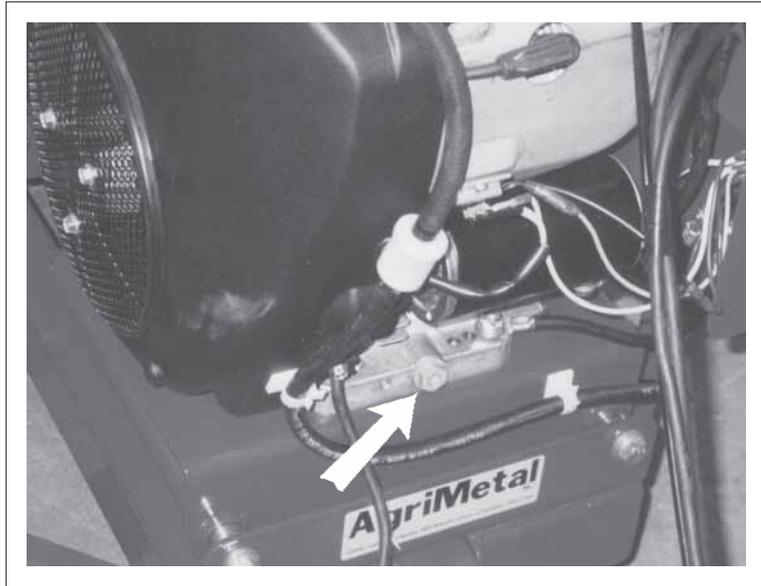


Fig. 25 ENGINE DRAIN PLUG

2. Clean air cleaner.

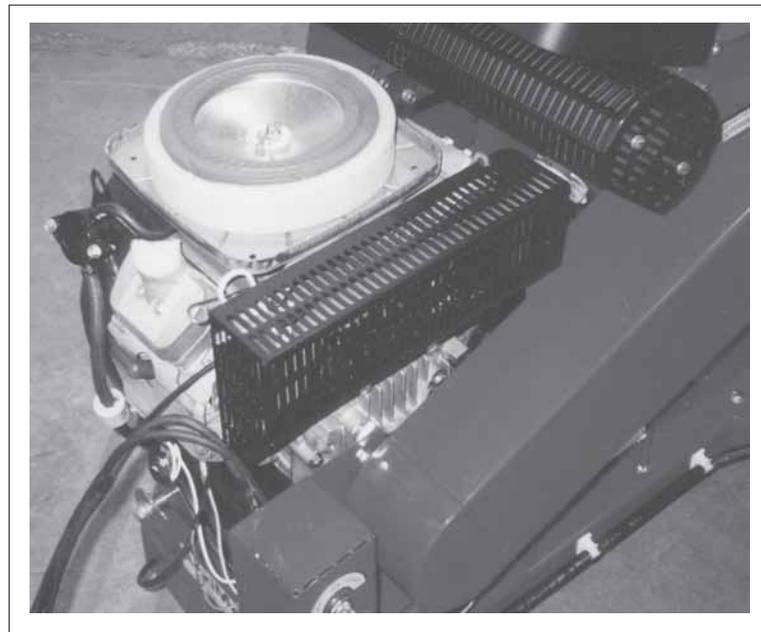


Fig. 26 AIR CLEANER

200 Hours

1. Change engine oil filter.



Fig. 27 OIL FILTER

Annually

1. Change in line fuel filter.

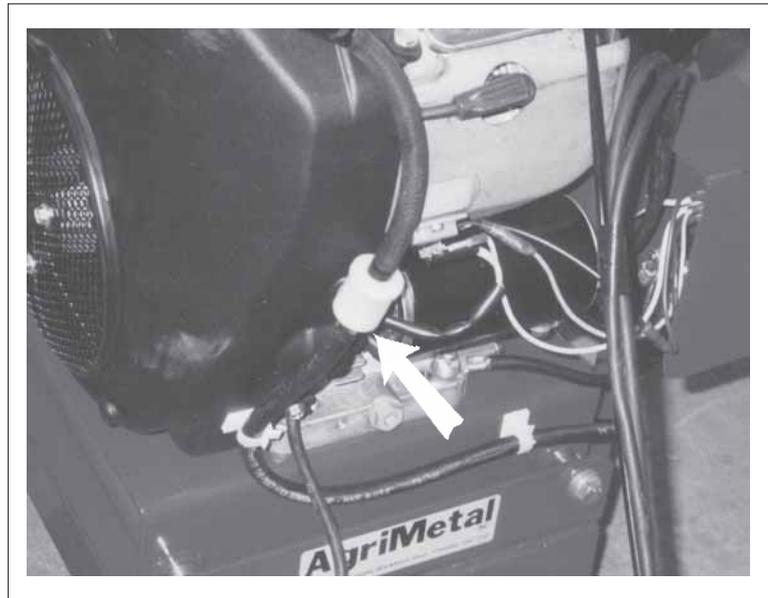


Fig. 28 IN LINE FUEL FILTER

2. Oil duct position roller chain.
3. Grease swivel.
4. Clean machine.

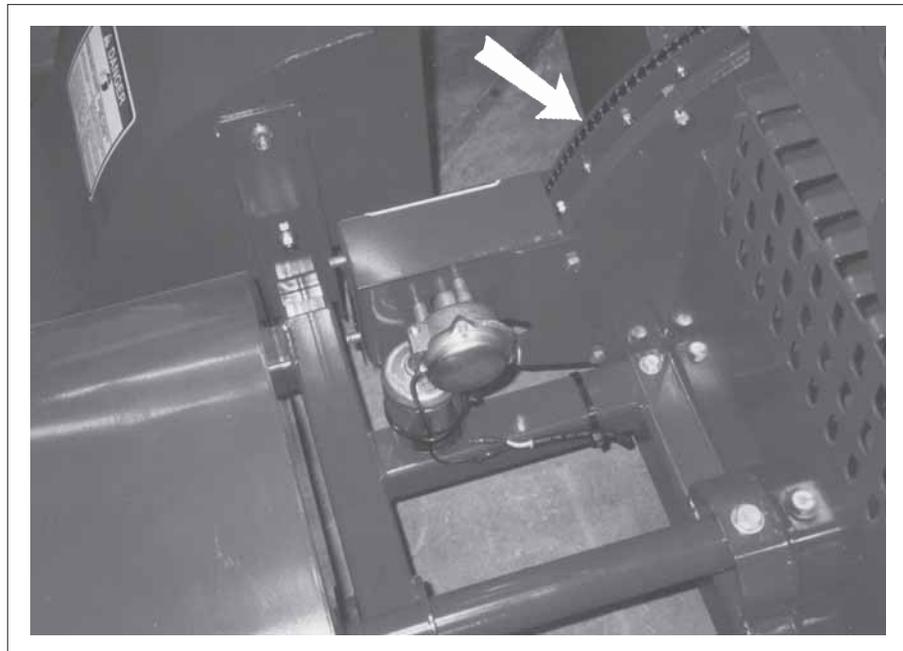


Fig. 29 DUCT POSITION ROLLER CHAIN

6.2 MAINTENANCE

By following a careful service and maintenance program for your machine, you will enjoy many years of trouble-free operation.

6.2.1 CLEANING AIR CLEANER

1. Review the Operator's Manual for the engine.
2. Place all controls in neutral, stop engine and remove ignition key before maintaining.
3. Remove the cover over the air cleaner.
4. Remove the foam from the engine.
5. Use an air hose to blow the dust and debris out of the foam.
6. Install foam.
7. Install and secure the cover.

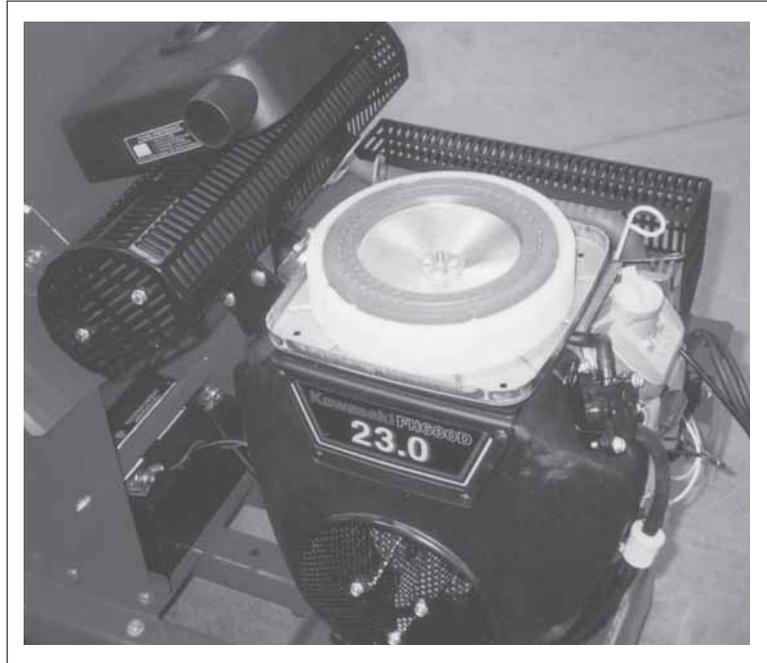


Fig. 30 AIR CLEANER

6.2.2 CHANGING ENGINE OIL AND FILTER

1. Review the Operator's Manual for the engine.
2. Place all controls in neutral, stop engine and remove ignition key before maintaining.
3. Allow the engine to cool before changing the oil. Hot oil can cause burns if it contacts exposed skin. It is best to change oil while the engine is warm to keep the contaminants in suspension.
4. Place a pan under the drain plug.
5. Remove the drain and allow the oil to drain for 10 minutes.
6. Install and tighten the drain plug.
7. Dispose of the used oil in an approved container.
8. Remove engine oil filter.
9. Apply a light coat of oil to the O ring and install the replacement filter. Snug up by hand and then tighten another 1/2 turn.
10. Fill the crankcase with specified oil.
11. Run the engine for 1-2 minutes and check for oil leaks.
12. If leaks are found around the drain plug or filter, tighten slightly. Repeat step 9.
13. Check engine oil level. Top up as required.

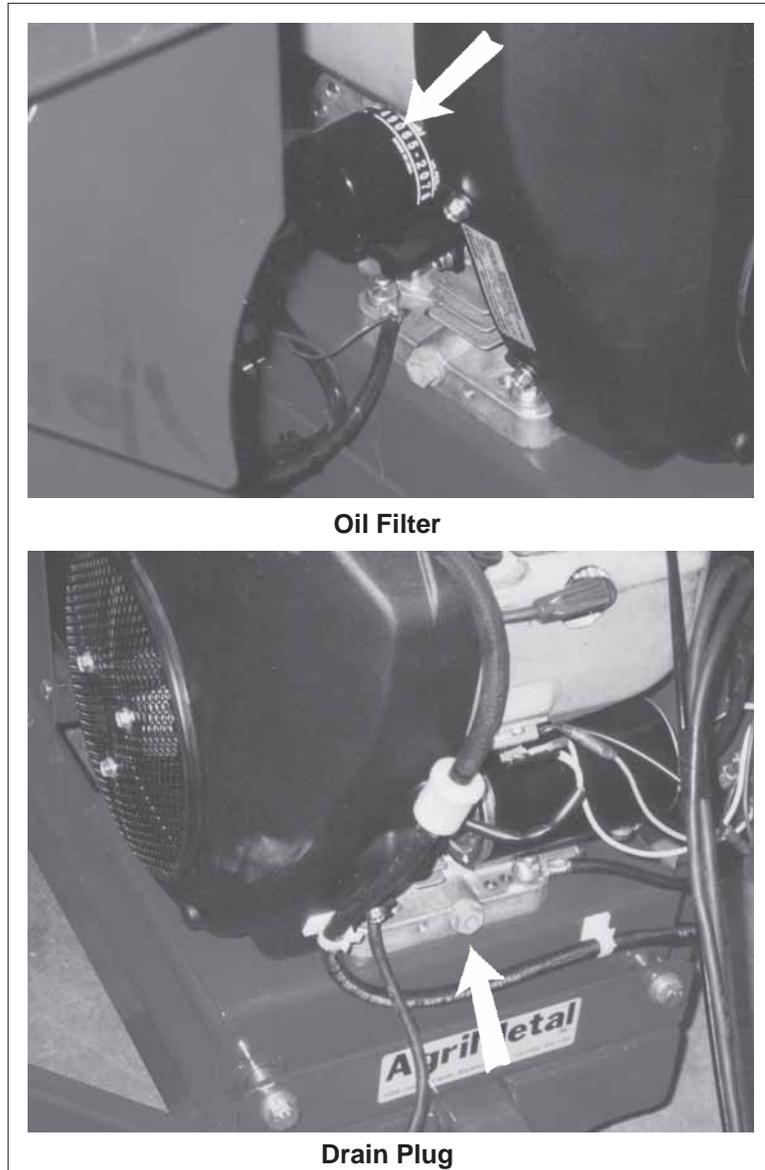


Fig. 31 ENGINE

6.2.3 BLOWER DRIVE BELT TENSION AND ALIGNMENT

A set of V belts transmits rotational power to the blower. They must be kept properly tensioned and the pulleys aligned to obtain the expected performance and life.

To check the tension and alignment, follow this procedure:

1. Clear the area of bystanders, especially small children.
2. Place all controls in neutral, stop engine, set park brake, remove ignition key and wait for all moving parts to stop before dismounting.
3. Measure the length of the motor tension spring. It should be 4 inches (102 mm) for the belt to be properly tensioned.
4. Remove guard over belt, release tensioner and replace belt when required.



WARNING

Machine is shown with guard removed for illustrative purposes only. Do not operate machine with guard removed.



Engine Base Spring




Belt

Fig. 32 DRIVE BELT

5. Lay a straight edge across the pulley faces to check the alignment. Use the pulley hub to adjust alignment if pulley faces vary more than 1/32 inch (.7 mm).



Alignment

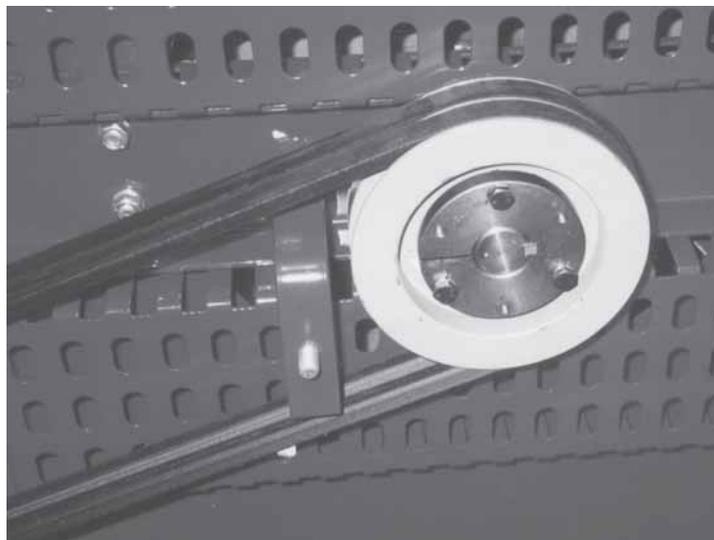

Pulley Hub



WARNING

Machine is shown with guard removed for illustrative purposes only. Do not operate machine with guard removed.

Fig. 33 BELT ALIGNMENT

6.2.4 DUCT POSITION DRIVE

The center duct is moved by an electric motor driving a sprocket into a roller chain.

To maintain drive, follow this procedure:

1. Clear the area of bystanders, especially small children.
2. Place all controls in neutral, stop engine, set park brake, remove ignition key and wait for all moving parts to stop before dismounting.
3. **Lubricating Roller Chain:**
 - a. Move center duct fully in one direction.
 - b. Apply lubricant to the exposed roller chain.
 - c. Move center duct to opposite side.
 - d. Apply lubricant to the exposed roller chain.
 - e. Move duct back and forth several times to distribute lubricant to all links.



Fig. 34 EXPOSED ROLLER CHAIN (TYPICAL)

4. **Set Chain Tension:**
 - a. Remove guard over chain drive system.
 - b. Loosen idler sprocket anchor nut.
 - c. Move sprocket into position to properly tension the roller chain.
 - d. Tighten idler sprocket anchor nut to its specified torque.
 - e. Mount guards and tighten fasteners to their specified torque.

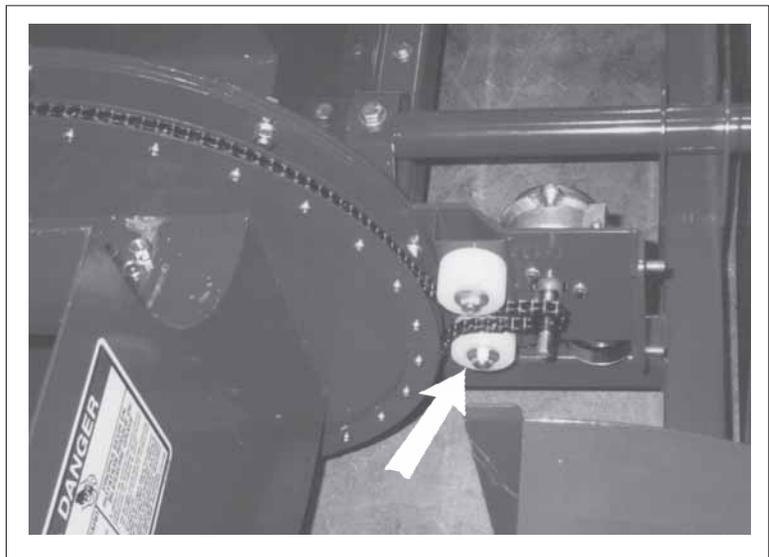


Fig. 35 IDLER SPROCKET



WARNING

Machine is shown with guard removed for illustrative purposes only. Do not operate machine with guard removed.

7 TROUBLE SHOOTING

The AgriMetal Pull-Type Leaf Blower is a large portable blower that can be used to blow leaves, grass clippings, trash and debris. It is a simple system that requires minimal maintenance.

In the following Trouble Shooting section, we have listed many of the problems, causes and solutions that can help you to solve the problems that you might encounter.

If you encounter a problem that is difficult to solve, even after having read through this trouble shooting section, please call your local distributor or dealer. Before you call, please have this Operator's Manual and the serial number of your machine at hand.

PROBLEM	CAUSE	SOLUTION
Engine won't start	No fuel.	Check fuel level, add as required.
	Closed shut-off valve.	Open shut-off valve.
	Plugged in line filter.	Replace in line filter.
	No power from battery.	Loose cable. Tighten cable. Battery low. Recharge battery.
Doesn't move debris/leaves.	No air flow.	Clean blower air intake guard slots.
	Wrong angle for air stream.	Level frame to provide proper air stream angle.
	Loose belt.	Tighten belt tension.
Machine vibrates.	Loose belts.	Tighten belts.

8 SPECIFICATIONS

8.1 MECHANICAL

PULL TYPE BLOWER	
BWT 200	
IMPELLER SIZE	20" X 9" (51 x 23 cm)
NO. OF BLADES	5
AIR FLOW SPEED	175 MPH (282km-h)
OUTLET SIZE	10" X 5" 25 x 13 cm)
CHUTE ROTATION	180 DEGREES
DRIVE SYSTEM:	belt driven
ENGINE	23 HP KAWASAKI
'LENGTH	106" (269 cm)
WIDTH	60" (152 cm)
HEIGHT	44" (112 cm)
MACHINE WEIGHT	820 PDS. (373 kg)
SHIPPING WEIGHT	890 PDS. (405 kg)
SHIPPING DIMENSION	60" X 72" X 50" 152 x 183 x 127 cm) HEIGHT

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


8.2 BOLT TORQUE

CHECKING BOLT TORQUE

The tables shown below give correct torque values for various bolts and capscrews. Tighten all bolts to the torques specified in chart unless otherwise noted. Check tightness of bolts periodically, using bolt torque chart as a guide. Replace hardware with the same strength bolt.


ENGLISH TORQUE SPECIFICATIONS

Bolt Diameter "A"	Bolt Torque *					
	SAE 2		SAE 5		SAE 8	
	N.m	(lb-ft)	N.m	(lb-ft)	N.m	(lb-ft)
1/4"	8	(6)	12	(9)	17	(12)
5/16"	13	(10)	25	(19)	36	(27)
3/8"	27	(20)	45	(33)	63	(45)
7/16"	41	(30)	72	(53)	100	(75)
1/2"	61	(45)	110	(80)	155	(115)
9/16"	95	(70)	155	(115)	220	(165)
5/8"	128	(95)	215	(160)	305	(220)
3/4"	225	(165)	390	(290)	540	(400)
7/8"	230	(170)	570	(420)	880	(650)
1"	345	(225)	850	(630)	1320	(970)

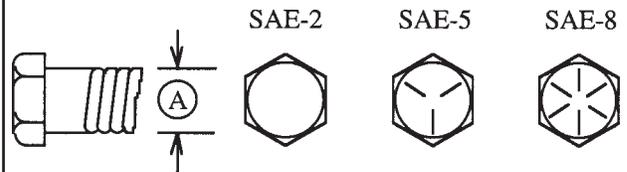

METRIC TORQUE SPECIFICATIONS

Bolt Diameter "A"	Bolt Torque*			
	8.8		10.9	
	(N.m)	(lb-ft)	(N.m)	(lb-ft)
M3	.5	.4	1.8	1.3
M4	3	2.2	4.5	3.3
M5	6	4	9	7
M6	10	7	15	11
M8	25	18	35	26
M10	50	37	70	52
M12	90	66	125	92
M14	140	103	200	148
M16	225	166	310	229
M20	435	321	610	450
M24	750	553	1050	774
M30	1495	1103	2100	1550
M36	2600	1917	3675	2710

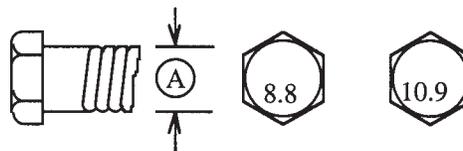

Torque figures indicated above are valid for non-greased or non-oiled threads and heads unless otherwise specified. Therefore, do not grease or oil bolts or capscrews unless otherwise specified in this manual. When using locking elements, increase torque values by 5%.

* Torque value for bolts and capscrews are identified by their head markings.

